

REVISION HISTORY

REV.	DESCRIPTION	ENR	DATE	BY	APPROVED
E	Chg weave size from 12x8 to 10x10	4876	10/7/2005	MDB	
C	ADD DOOR OPENING HEIGHT DIM.	3966	11/19/2002	MRP	
D	REVISE MIN. DOOR SIZE TO 8'x8'	4164	7/24/2003	RLK	

SPECIFICATIONS:

DOOR SIZE: MINIMUM SIZE: 8' x 8'
 MAXIMUM SIZE: 20' x 18'



SCREEN MATERIAL: STD. - 17 X 11 WEAVE, .025" THREAD DIAMETER, YELLOW, RED, BLUE, GRAY

OPT. - 10 X 10 WEAVE, .028" THREAD DIAMETER, BLACK

DRIVE SYSTEM: MANUAL OPERATION IS ACCOMPLISHED BY SLIDING THE CURTAIN IN A TROLLEY AND TRACK SYSTEM.

TRACK SYSTEM: GALVANIZED STEEL TRACK. TROLLEYS HAVE 1 INCH STEEL WHEELS AND ARE SPACED 12 INCHES APART.

DOOR OPENING WIDTH	DIM 'A'
≤ 10' - 0"	24"
> 10' - 0" TO 15' - 0"	30"
> 15' - 0" TO 20' - 0"	36"
> 20' - 0" TO 25' - 0"	42"

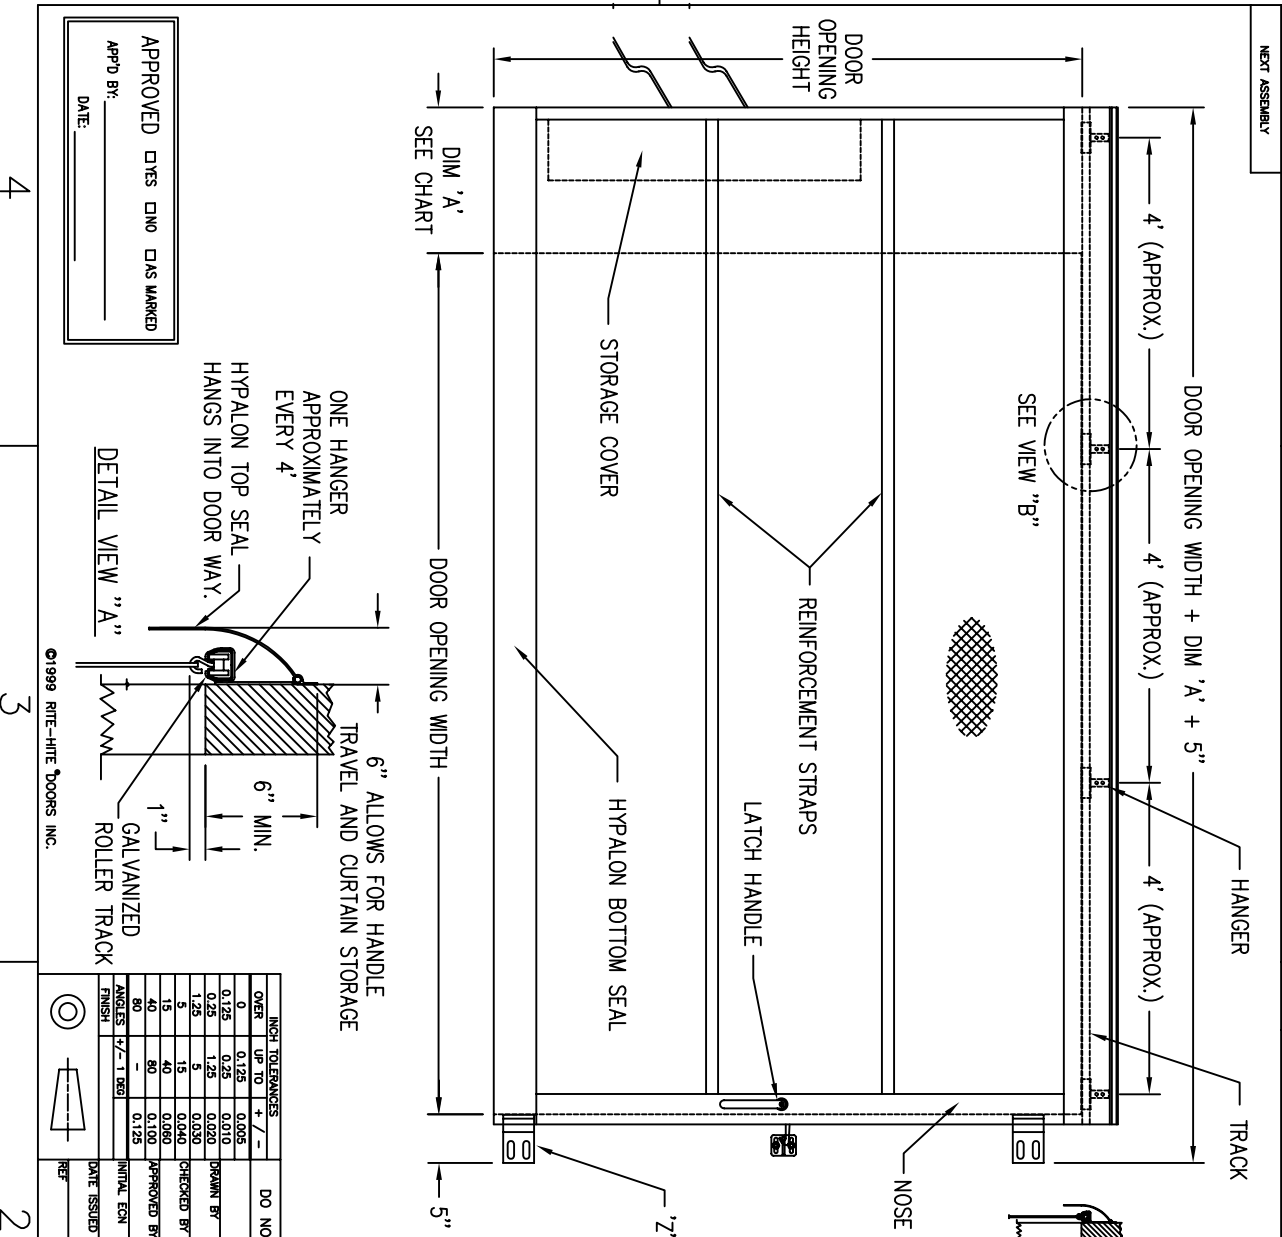

ONE HANGER APPROXIMATELY EVERY 4'
 HYPALON TOP SEAL HANGS INTO DOOR WAY.
 6" ALLOWS FOR HANDLE TRAVEL AND CURTAIN STORAGE
 6" MIN.
 GALVANIZED ROLLER TRACK

DETAIL VIEW "A"

APPROVED YES NO AS MARKED
 APP'D BY: _____
 DATE: _____

ITEM	QTY	PART NO.	DESCRIPTION
PARTS LIST / MATERIAL			

RITE-HITE DOORS INC.

ARCHITECTURAL APPROVAL
 SLIDING MODEL BUGSHIELD, FACE MO

INCH TOLERANCES		DO NOT SCALE DRAWING	
OVER	UP TO	+ / -	
0	0.125	0.005	MM-DD-YY
0.125	0.25	0.010	DRAWN BY
0.25	1.25	0.020	DATE
1.25	5	0.030	CHECKED BY
5	15	0.040	DATE
15	40	0.060	APPROVED BY
40	60	0.100	DATE
60	125	0.125	INITIAL ENR
FINISH		DATE ISSUED	
ANGLES 7/1-089		REF	

SCALE: 6"=1'
 DWG NO. 9803A001
 SHEET 1