

# Barrier Glider® Cold Storage Door - Bi-Parting

The Barrier Glider improves on the technology of traditional cold storage doors to deliver more value at your temperature controlled openings.

Iso-Tek® panel construction is combined with the Thermal-Flex Sealing System to help you achieve superior environmental separation at your opening with lower energy costs.

**Flexible Iso-Tek® panels deliver** superior environmental separation and increased impactability.

**Simple, straightforward design** provides long-term performance.

**High speed operation** maximizes the time the door is closed to help reduce energy costs.

**Energy efficient design** reduces heat gain into cold storage areas, lowers energy costs.

**Panels seal tight against wall,** yet release upon impact with unique panel retention system.



## Thermal-Flex Sealing System

provides a warm flexible seal while using a fraction of the energy of other door systems.

## Smart, Connected Capabilities

Rite-Hite provides smart, connected capabilities as part of the Rite-Hite Extended Warranty. Facilities gain visibility into their doors productivity and maintenance, helping to increase safety through the Rite-Hite Digital Platform.



Panel Retention System



Flexible, Impactable R-10 panels

# Specifications

## Speed

- » **Opening:** up to 80" per second (2.03 m/s)
- » **Closing:** 30" per second (0.76 m/s)

## Size

- » **Bi-parting door**
  - Minimum** – 6' w x 8' h (1828 mm x 2440 mm)
  - Maximum** – 12' w x 20' h (3657 mm x 6096 mm)

- » **Available also in Single Slide door**

## Temperature range

-20° to +120° F (-29° to 49° C)

## Panel design

Flexible, impactable R-10 panels are 3" (76 mm) thick with insulating foam core. Panels covered with 30 oz. gray (optional white panels) polyurethane fabric. Optional 4-pane vision panels are 14" x 32" (355 mm x 812 mm). Panel retention system keeps panels tight against seals, yet allows panels to swing away from the wall upon impact and automatically reset.

## Graphic User Interface (GUI)

Industry's only 7" (178 mm) LCD touch screen interface, that displays real time door status, and provides increased safety by allowing an individual to simply access the control box settings without wearing the necessary PPE often required for accessing a live electrical panel.

## Control box

- » i-COMM™ 3 Digital Controller, variable frequency drive.
- » Pre-wired and factory tested.
- » Standard fiberglass NEMA 4X.

## Electrical requirements

- » **Single-Phase** – 220V-240V
- » **Three-Phase** – 208V, 230V, 400V, 460V, 575V

## Thermal-Flex Sealing System

Consists of a heated perimeter seal heated floor seal and thick insulated seal nose. (Optional: heated nose seal).

## Header/trolley assembly

Track constructed of heavy gauge round tubing to provide large wear surface for the trolley's urethane rollers. Hourglass-shaped rollers allow panel to rotate on the track for enhanced panel impactability. Vertical support posts constructed of 1" x 3" (25 mm x 76 mm) 11 ga steel tubing.

## Drive system

1 HP AC motor with a power on brake. The beveled gearbox can be back driven in the event of a power outage, which will disengage the brake, and allow the panels to be manually opened and closed.

## Safety features


Quick operation helps prevent impact. Flexible panels, panel retention system and tubular track/roller system help prevent impact damage. Automatic reversing when obstruction is encountered in opening, without use of reversing edge. Optional vision panels.

## Limited warranty

Five (5) Year for motor, brake and gearbox.  
Two (2) Year on all mechanical and electrical parts.  
One (1) Year labor.

## Rite-Hite extended warranty

Seven (7) Year drive system.  
Three (3) Year fabric/panel, electrical & mechanical.  
Two (2) Year labor.

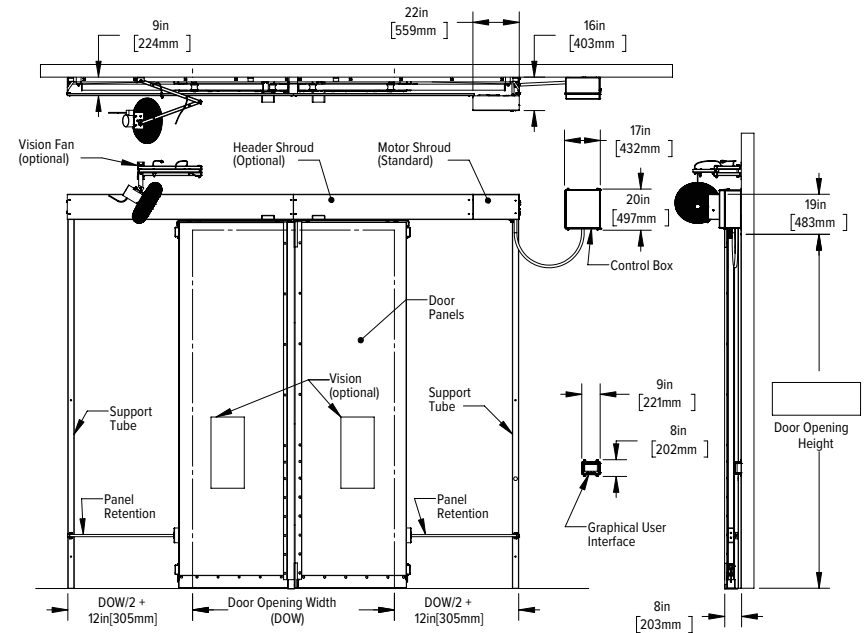

**RITEHITE**  
ALWAYS LOOKING AHEAD

D23BGBPSS1023G1

Milwaukee, Wisconsin, USA

[www.ritehite.com](http://www.ritehite.com)

P 414-355-2600 (800-456-0600)

F 414-355-9248

Rite-Hite®, Barrier®, Iso-Tek®, i-COMM™ are trademarks of the Rite-Hite Holding Corporation. Rite-Hite products may be covered by one or more U.S. Patents with other U.S. and foreign patents pending. Patent coverage: [www.ritehite.com/patents](http://www.ritehite.com/patents). The information herein is provided as a general reference only regarding the use of the applicable products. The specifications stated here are subject to change. Manufactured by Rite-Hite Doors, Inc.