

GateKeeper™

SPECIFICATIONS

10 Gauge (.1345") Steel Frame Powder Coat Yellow

4" (102 mm) Wide x 8-3/8" (213 mm) Deep Vertical Frames, 6" (152 mm) Formed Front & Side Headers

4" (102 mm) Integral Toe Boards

Front Rails Heights of 21" (533mm) and 42" (1067 mm) per OSHA 1910.23(e)(2)

1.75" (44.5 mm) OD Steel Pipe for Widths thru 9 Feet 1 inch (2769 mm)

1.66" (42.2 mm) OD Aluminum Pipe for Widths 9 Feet 2 Inches (2794 mm) and over

3" (76.2 mm) Galvanized Steel Roller Track with Nylon Wheels

Manual GateKeeper Includes Safety Latch with Two Hand Operation


GateKeeper with Operator

ZAP Operator 110/220 Volts & 50/60 Hertz Field installed Left or Right


Open / Stop / Close Buttons with Photoeyes

#40 Chain and Sprocket Trolley System

Additional Side Clearance Required

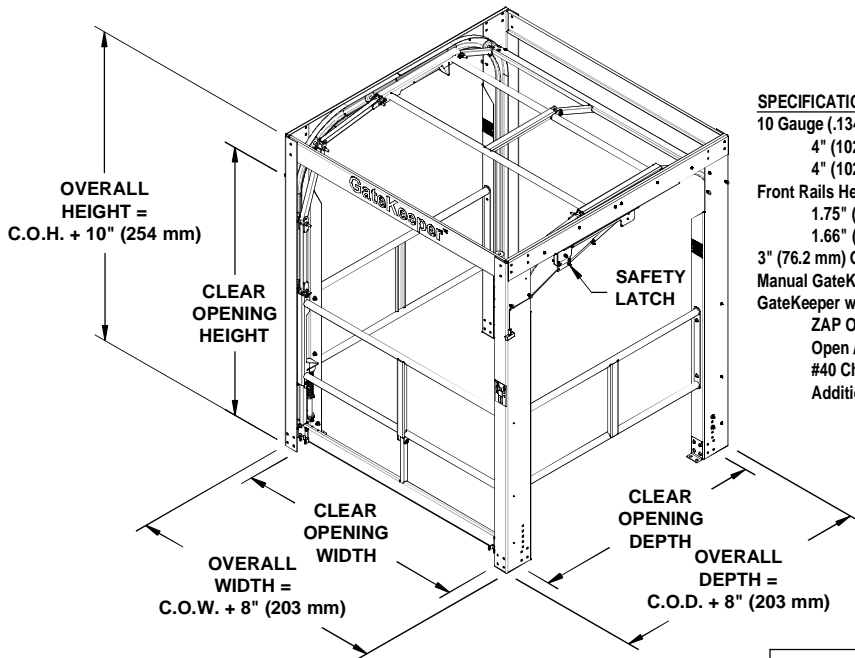

GateKeeper™

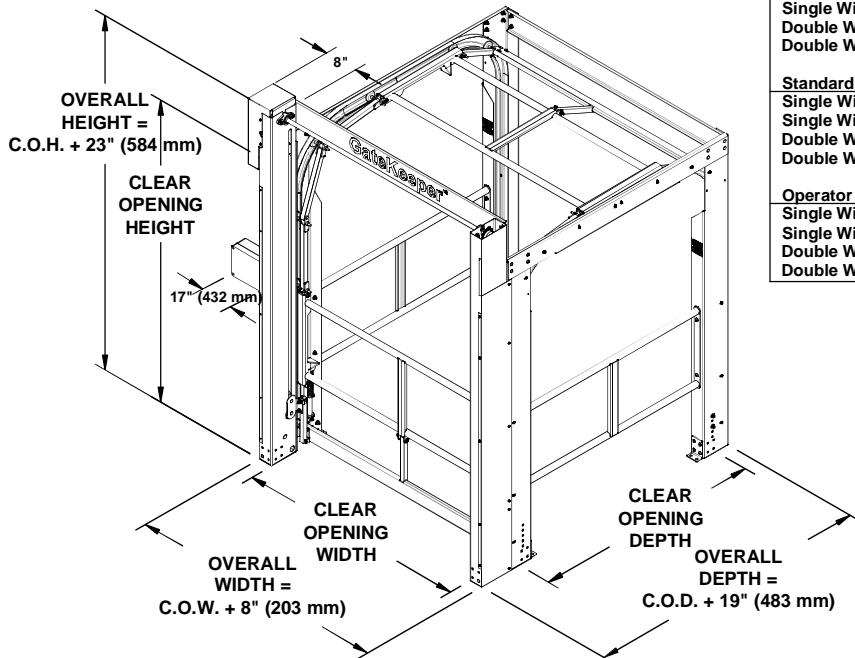

GateKeeper™ with Operator

Standard Sizes

Clear Opening Width x Clear Opening Height x Clear Opening Depth

Minimum Non-Standard Size = 4' 0" (1219 mm) x 5' 0" (1524 mm) x 4' 0" (1219 mm)

Maximum Non-Standard Size = 8' 6" (2591 mm) x 9' 0" (2743 mm) x 8' 6" (2591 mm)

Clear Opening Sizes	Width C.O.W.	Height C.O.H.	Depth C.O.D.
Single Wide x Single Deep	5' 6" (1676 mm)	6' 8" (2032 mm)	5' 6" (1676 mm)
Single Wide x Double Deep	5' 6" (1676 mm)	6' 8" (2032 mm)	8' 6" (2591 mm)
Double Wide x Single Deep	8' 6" (2591 mm)	6' 8" (2032 mm)	5' 6" (1676 mm)
Double Wide x Double Deep	8' 6" (2591 mm)	6' 8" (2032 mm)	8' 6" (2591 mm)
Standard Overall Sizes	C.O.W. + 8" (203 mm)	C.O.H. + 10" (254 mm)	C.O.D. + 8" (203 mm)
Single Wide x Single Deep	6' 2" (1880 mm)	7' 6" (2286 mm)	6' 2" (1880 mm)
Single Wide x Double Deep	6' 2" (1880 mm)	7' 6" (2286 mm)	9' 2" (2794 mm)
Double Wide x Single Deep	9' 2" (2794 mm)	7' 6" (2286 mm)	6' 2" (1880 mm)
Double Wide x Double Deep	9' 2" (2794 mm)	7' 6" (2286 mm)	9' 2" (2794 mm)
Operator Overall Sizes	C.O.W. + 8" (203 mm)	C.O.H. + 23" (584 mm)	C.O.D. + 19" (483 mm)
Single Wide x Single Deep	6' 2" (1880 mm)	8' 7" (2616 mm)	7' 1" (2159 mm)
Single Wide x Double Deep	6' 2" (1880 mm)	8' 7" (2616 mm)	10' 1" (3073 mm)
Double Wide x Single Deep	9' 2" (2794 mm)	8' 7" (2616 mm)	7' 1" (2159 mm)
Double Wide x Double Deep	9' 2" (2794 mm)	8' 7" (2616 mm)	10' 1" (3073 mm)

1. CLEAR OPENING WIDTH

Single Pallet Width = 5 ft 6 in (1676 mm)

Double Pallet Width = 8 ft 6 in (2591 mm)

Non-Standard Width = ft in OR mm

2. CLEAR OPENING HEIGHT

Standard Height = 6 ft 8 in (2032 mm)

Non-Standard Height = ft in OR mm

3. CLEAR OPENING DEPTH

Single Pallet Depth = 5 ft 6 in (1676 mm)

Double Pallet Depth = 8 ft 6 in (2591 mm)

Non-Standard Depth = ft in OR mm

4. OPERATOR

YES

NO

APPROVED FOR
MANUFACTURING

DATE

END USER

JOB SITE ADDRESS



8900 North Arbon Drive
Milwaukee WI 53223
www.RiteHite.com
414-355-2600



JUNE 2013

Standard Sizes

Clear Opening

Width x Height x Depth

GateKeeper™

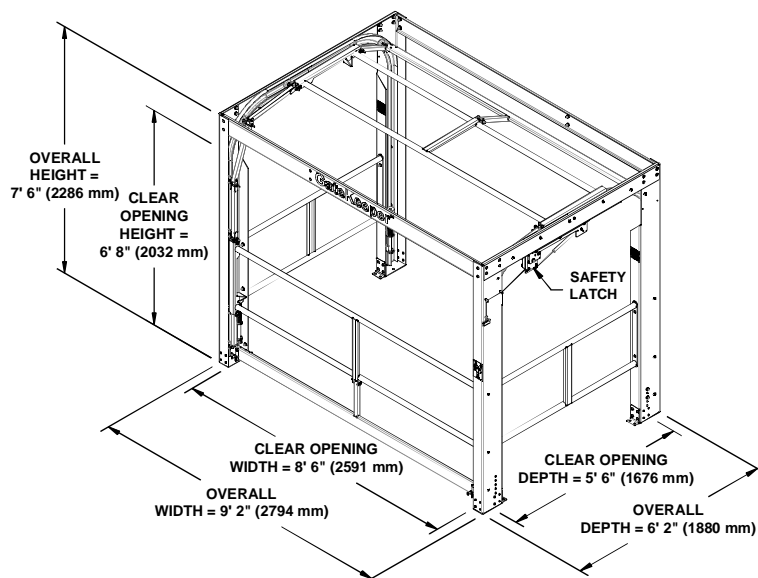
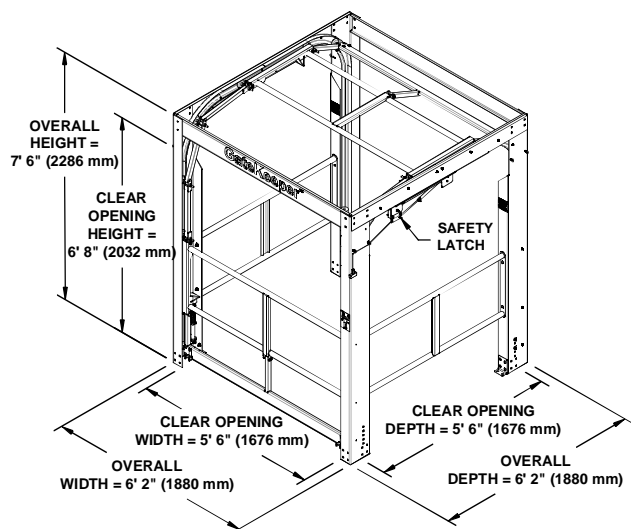


SINGLE WIDE X SINGLE DEEP

5' 6" (1676 mm) W x 6' 8" (2032 mm) H x 5' 6" (1676 mm) D

DOUBLE WIDE X SINGLE DEEP

8' 6" (2591 mm) W x 6' 8" (2032 mm) H x 5' 6" (1676 mm) D

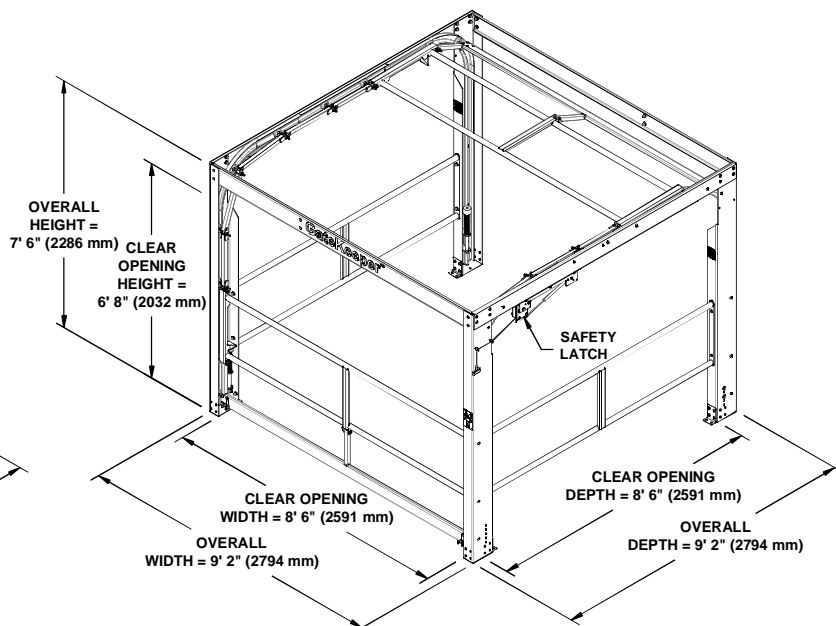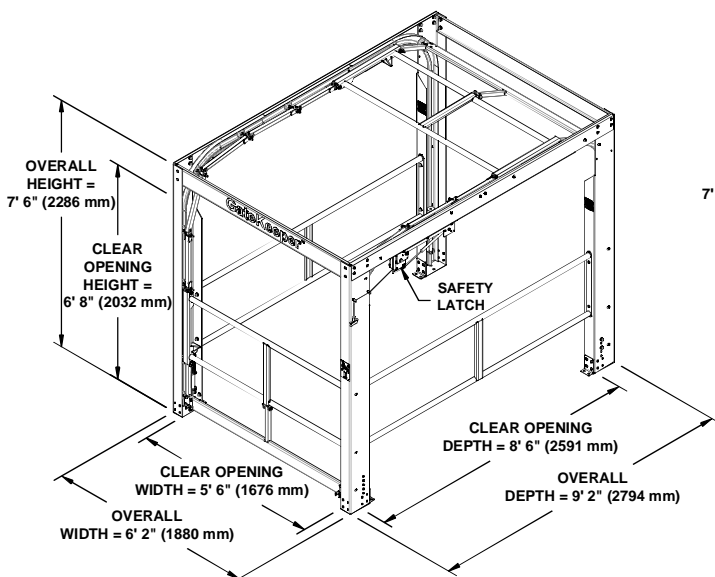

SINGLE WIDE X DOUBLE DEEP

5' 6" (1676 mm) W x 6' 8" (2032 mm) H x 8' 6" (2591 mm) D

DOUBLE WIDE X DOUBLE DEEP

8' 6" (2591 mm) W x 6' 8" (2032 mm) H x 8' 6" (2591 mm) D

END USER

JOB SITE ADDRESS



8900 North Arbon Drive
Milwaukee WI 53223
www.RiteHite.com
414-355-2600

JUNE 2013