


# STEEL-RITE™ Sectional Door VERTICAL LIFT SPECIFICATIONS

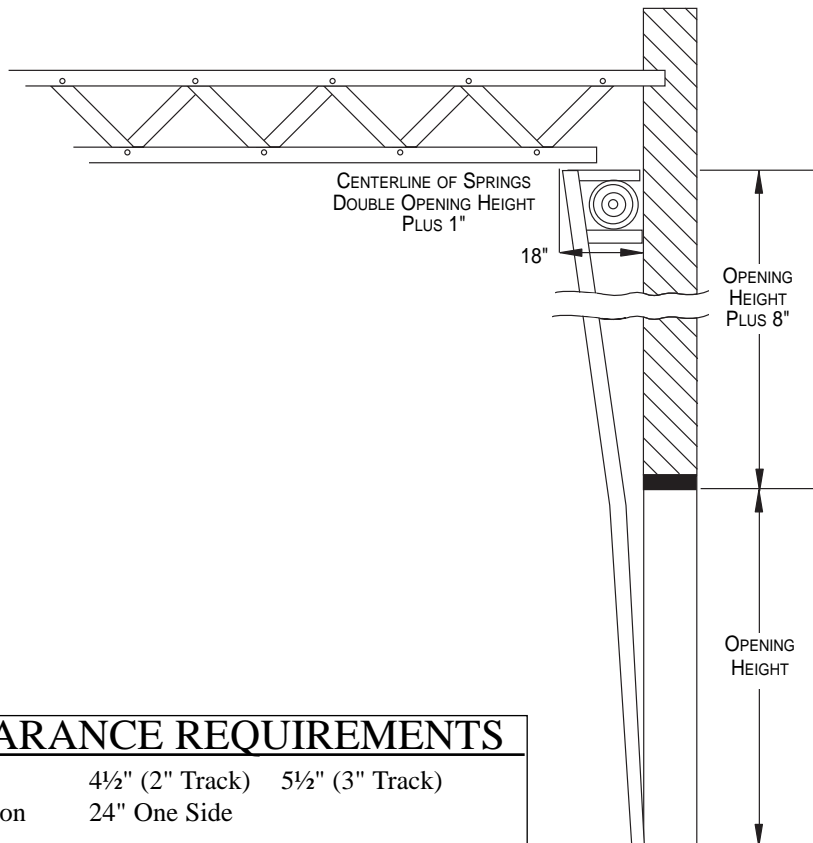

## SIDE CLEARANCE REQUIREMENTS

Manual Operation	4½" (2" Track)	5½" (3" Track)
Motorized Operation	24" One Side	

## GENERAL SPECIFICATIONS

Model Number: 5224 SECTIONAL DOOR

### SIZE:

Minimum: 4' x 6'  
Maximum: 16' x 14'

### PERIMETER SEALS:

Deep interlocking joint seals between sections and flexible vinyl astragal on bottom edge. Optional track-mounted side seal, rubber header seal and foam joint seal.

### TRACK:

16 gauge hot-dipped galvanized steel track available in 2" or 3". Track rollers are case-hardened inner steel races with 10-ball rollers.

### SECTION DESIGN:

Sections constructed of a true 24-gauge roll formed steel. Baked-on polyester primer and polyester finish coats over hot-dipped galvanized steel on both panel sides. C-shaped stiles fit the deep-rib contour of the 2" thick sections. Hot-dipped galvanized steel hardware and pre-located holes for easy installation. Optional 24" x 6" lites available. Optional insulation available.

### OPERATION:

Torsion spring counterbalance system with galvanized steel aircraft cable. Standard 10,000 cycle spring. Optional 25,000, 50,000 and 100,000 cycle springs available. Optional jackshaft motor operator.

### WARRANTY:

Sections warranted for ten (10) years against cracking, splitting or deterioration due to rust-through, and seven (7) years against separation/degradation of foam insulation. Ten (10) years on insulation value.

*Certified for construction:*

By: \_\_\_\_\_

Job: \_\_\_\_\_

Date: \_\_\_\_\_

Location: \_\_\_\_\_

Company: \_\_\_\_\_

City: \_\_\_\_\_

Size: \_\_\_\_\_

State: \_\_\_\_\_

**RITE-HITE®  
DOORS**  
The Leading Edge In Door Safety.

8900 North Arbon Drive  
Milwaukee, WI 53223  
Toll free 1-800-456-0600  
1-414-355-2600  
Fax: 1-414-355-9248  
www.ritehite.com